


12kV、24kV 空心复合绝缘子 12kV、24kV Composite Hollow Insulator

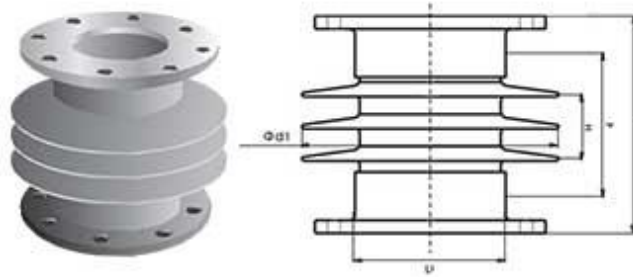

12kV、24kV 空心复合绝缘子示意图
12kV、24kV Composite Hollow Insulator Diagram

12kV、24kV 空心复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of 12kV、24kV Composite Hollow Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定弯曲负荷 Specified Bending Withstand Load	结构高度 Section Length	最小伞裙距离 Min. Arcing Distance	内管直径 Tube Inner Diameter	大伞直径 Big Shed Diameter	最小公称爬电距离 Min Nominal Creepage Distance	雷电冲击耐受电压(峰值) Lightning Impulse Withstand Voltage(Peak Value)	工频耐受电压(有效值) Power Frequency Withstand Voltage Min. Value(RMS)	参考重量 Reference Weight
		kV	kN	H mm	h mm	D mm	d1 mm	L mm	U ₅₀ kV	U ₁ kV	kg
1	FK-12(13.5)	12	1/3/5	138	>108	70	160	240	72	24	1.6
2	FK-24(13.5)	24	1/3/5	190	≥147	100	170	480	81	34	2.2

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.